

A miniature resistance weld package which can be preformed into smd formats.

The UM-4 resistance weld enclosure is ideally suited for the manufacture of precision AT cut high reliability resonators. Available in a choice of two lead variants.

A wide frequency range combined with a dry nitrogen environment makes this an ideal choice for applications requiring miniature high quality resonators at an economic price.


Custom specified with typical data as follows:

Specification data:

Environment	dry nitrogen
Quartz orientation	AT cut
Frequency range	(3 ~ 25)MHz fundamental (5 ~ 70)MHz 3rd overtone (50 ~ 120)MHz 5th overtone
Adjustment tolerance	from ± 1.5 ppm at ref. temp. frequency dependent
Thermal stability	OCXO turn point from $\pm 3^{\circ}\text{C}$ TCXO from $\pm 0.5^{\circ}$ equivalent \emptyset angle XO from ± 3 ppm temperature dependent
Operating temperature	$(-55 + 125)^{\circ}\text{C}$ custom specified
Storage temperature	$(-40 + 125)^{\circ}\text{C}$
Load	custom specified
Shunt capacitance C_0	(1.5 ~ 8.0)pF
Suggested drive level	(5 ~ 150) μW
Q factor	up to 250K, frequency, mode and cut dependent
Ageing - frequency dependent	AT cut: ± 1 ppm typical, first year max.
Insulation resistance	500Meg. Ω min. at 100Vd.c.

Dimensions(mm):

UM-4

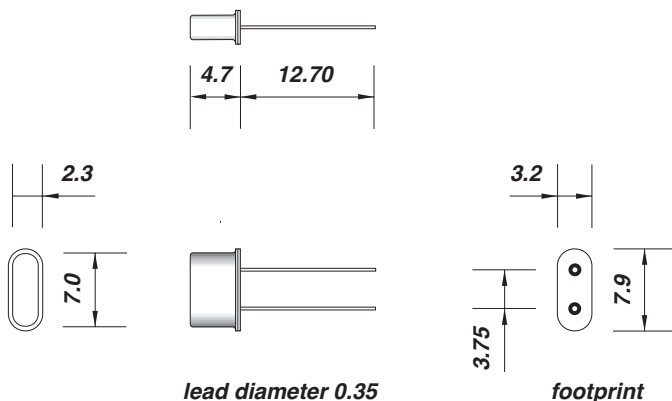

UM-4-smd

